


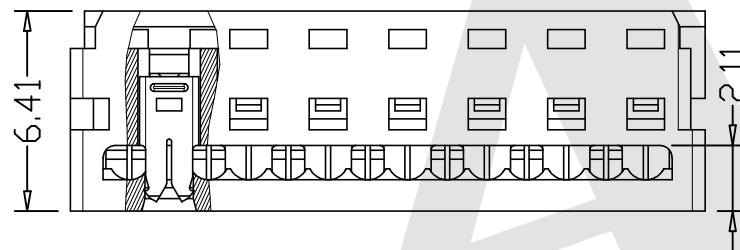
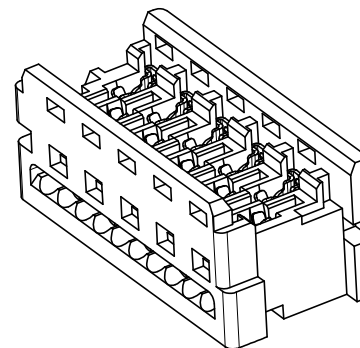


HSF

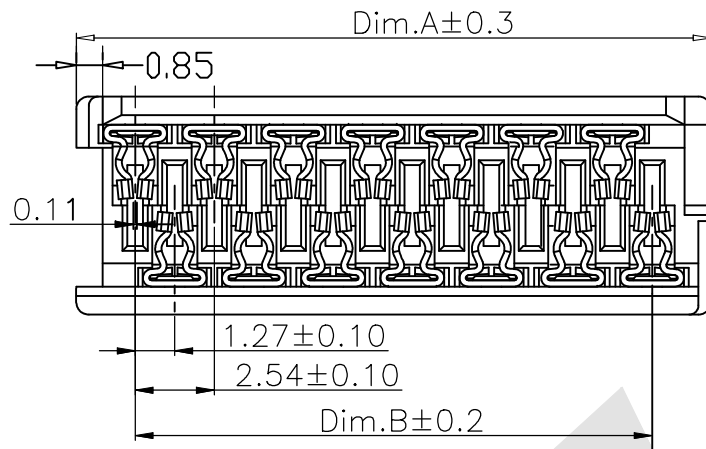

Dimension:

Pos.	Dimension	
	A	B
04	7.59	3.81
06	10.13	6.35
08	12.67	8.89
10	15.21	11.43
12	17.75	13.97
14	20.29	16.51
16	22.83	19.05
18	25.37	21.59
20	27.91	24.13
22	30.45	26.67
24	32.99	29.21
26	35.53	31.75



AWG #26 and #28

Specifications(特性):

Current Rating(额定电流): 2.4A Max
Contact Resistance(接触阻抗): 20 milliohms MAX
Dielectric Withstanding Voltage(耐电压): 500V AC AT Sea Level
Insulation Resistance(绝缘阻抗): 1000 Megohms MIN
Operating Temperature(工作温度): -40° C to +105° C
Housing(塑胶): Temperature Thermoplastics, PBT UL 94V-0(耐高温塑胶 PBT)
Contact(端子): Brass(铜) Sn Over Ni(镍底, 全锡)

Ordering Code:

PFCI01 - X - X - X - X
① ② ③ ④ ⑤

① Series No:

② No. of Contacts

04=4P 06=6P 08=8P
10=10P 12=12P 14=14P
16=16P 18=18P 20=20P
22=22P 24=24P 26=26P

③ Contact Plating


G0: Gold flash S0: Gold flash/Ni
G1: 3u" Gold S1: 3u" Gold/Ni
G2: 5u" Gold S2: 5u" Gold/Ni
G3: 10u" Gold S3: 10u" Gold/Ni
G4: 15u" Gold S4: 15u" Gold/Ni
G5: 30u" Gold S5: 30u" Gold/Ni
SN: Tin

④ Color Insulator

W: White

⑤ Packing

A: Tray
B: Bag
C: Tube
D: Tape Reel

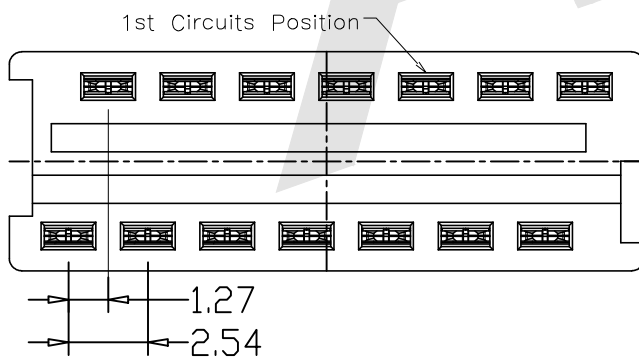

Unless Otherwise specified tolerance

X. XX: ±0.20
X. X: ±0.25 X. XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

Gong Feng

DATE

08/11/2017

CHECK

BobYang

DATE

08/11/2017



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

1.27mm white IDC Type

DRAWING NO:

PFCI01-XXXX

PRODUCT NO:

PFCI01-XXXX

REV

DESCRIPTION

DATE