


HSF



RoHS

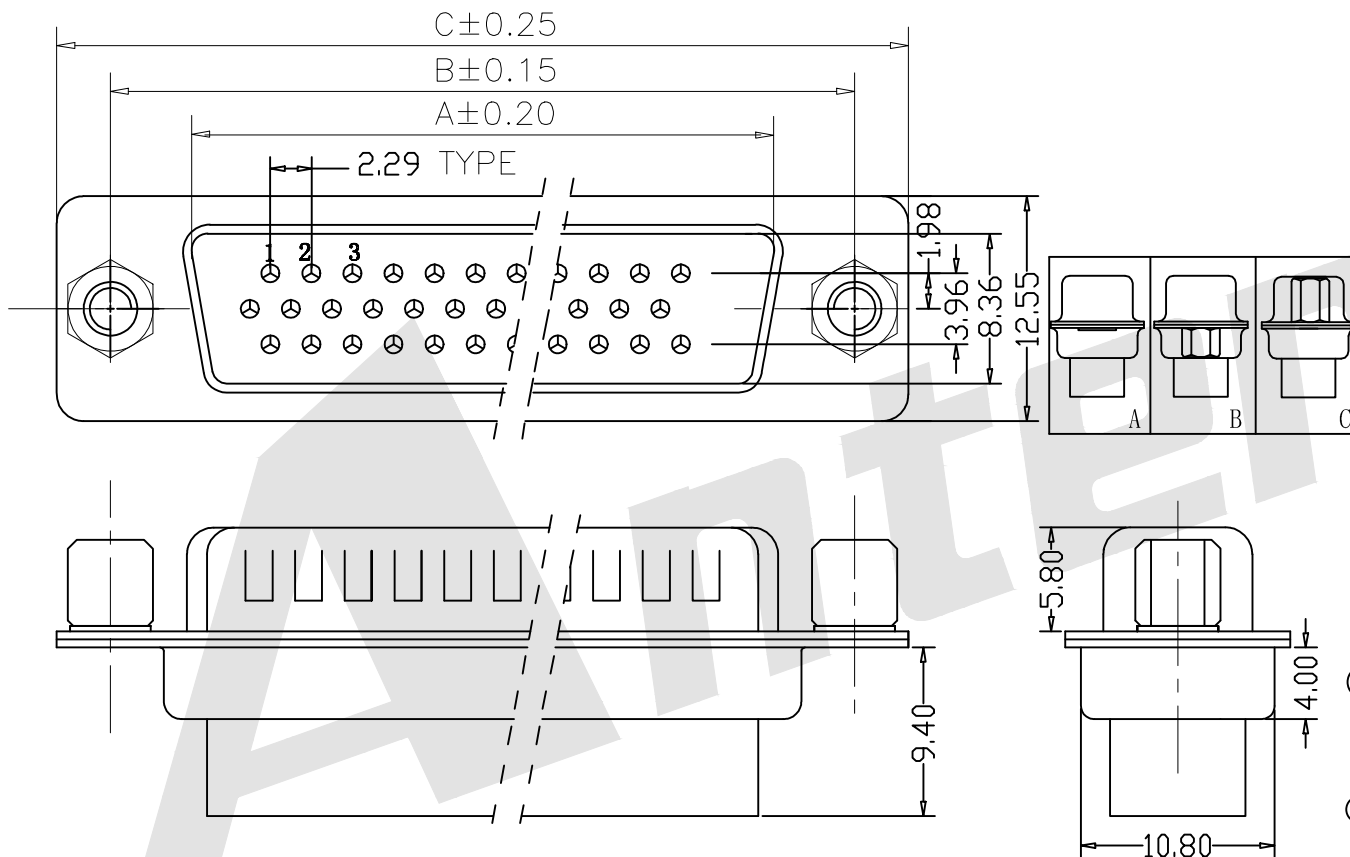

	15pin	26pin	44pin	62pin
A	16.92	25.25	38.96	55.42
B	24.99	33.32	47.04	63.50
C	30.80	39.10	53.00	69.30

Material:

Housing: Temperature Thermoplastics, PBT+G.F UL 94V-0
 Contact: Brass or Bronze
 Shell: 0.35T Steel Nickel Plating All Area

Electical Characteristics:

Current Rating: 5A
 Contact Resistance: 20 milliohms Max
 Withstanding Voltage: 500V AC For 1 Minute
 Insulation Resistance: 1000 Megohms Min
 Operating Temperature: -55° C to +105° C


Ordering Code:

HDC01 - M - X - A - 0 - B - S
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Three Row Crimp Type
- ② Contact Type:
M:Male
- ③ Contact NO. :
15=15pin 26=26pin
44=44pin 62=62pin
- ④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
- ⑤ Accessories:
O:Non Accessories
A: Zinc alloy 4.8mm Nickel
A1:Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1:Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1:Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1:Copper screw 5.8mm Nickel
- ⑥ Color Code:
W:White L:Blue
B:Black G:Grey
- ⑦ Contact Plating
S: Selective Gold
S1:Selective 3u" Gold
S2:Selective 5u" Gold
S3:Selective 10u" Gold
S4:Selective 15u" Gold
S5:Selective30u" Gold
G0: Gold flash
G1: 3u" Gold over
G2: 5u" Gold over
G3: 10u" Gold over
G4: 15u" Gold over
G5: 30u" Gold over

Unless Otherwise specified tolerance
 X. ±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
 DRAW Lv Xun Hua DATE 27/03/2019
 CHECK BobYang DATE 27/03/2019



ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: D-SUB Male Three Row Crimp Type (stamped Pin)

DRAWING NO: HDC01-MXXXXX

PRODUCT NO: HDC01-MXXXXX

REV	DESCRIPTION	DATE